



# Resistance Temperature Sensors

Product	Description	Temperature		Accuracy	Page
		°F	°C		
<b>RTDs</b>	Accurate, repeatable and interchangeable over a wide operating range.	-328 to 1200	-200 to 650	DIN Class A ± 0.06% at 32°F (0°C) DIN Class B ±0.12% at 32°F (0°C)	<b>68</b>
<b>ENVIROSEAL™ HD</b>	Suited for heavy-duty applications including those in harsh environments.	-40 to 392	-40 to 200	Available with either RTD or thermistors. See information above.	<b>80</b>














## RTDs

### Bends

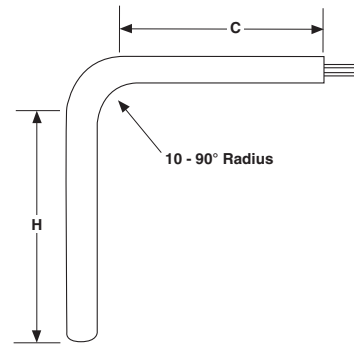Diameter in.	Standard Bend Radius in.	Minimum "H" Dimension in.	Minimum "C" Dimension in.
0.125	3/8	2	2
0.188	3/8	2	2
0.250	1/2	2	2



### Lead Terminations

Termination	Code	Length
 <b>Standard Male Plug</b>	A	—
 <b>Standard Female Jack</b>	B	—
 <b>Standard Male Plug with Mating Connector</b>	C	—
 <b>Miniature Male Plug</b>	J	—
 <b>Miniature Female Jack</b>	K	—
 <b>Miniature Male Plug with Mating Connector</b>	L	—
 <b>Split Leads</b>	T	1 1/2*
 <b>#8 Spade Lugs</b>	U	1 1/2*

\* When style contains jacketed wire.



# Resistance Temperature Sensors





## RTDs

### Fitting Options

#### Fixed Fittings

Fitting Type	Material	Sheath Size in.	NPT Thread Size in.	Hex Size in.	Length in.	Code
 <p><b>Fixed Single Thread 1/8 NPT</b> Customer Specified</p>	303 SS	0.063 to 0.250	1/8	7/16	11/16	A
 <p><b>Fixed Single Thread 1/4 NPT</b> Customer Specified</p>	303 SS	0.125 to 0.250	1/4	9/16	7/8	B
 <p><b>Fixed Single Thread 1/2 NPT</b> Customer Specified</p>	303 SS	0.125 to 0.250	1/2	7/8	1	D
 <p><b>Fixed Double Thread 1/2 NPT</b> Customer Specified</p>	303 SS	0.125 to 0.250	1/2	7/8	1 3/4	F

#### Compression Fittings

Fitting Type	Material	Sheath Size in.	NPT Thread Size in.	Hex Size in.	Length in.	Code
 <p><b>Non-Adjustable Compression Brass</b></p>	Brass	0.125	1/8	1/2	1	J
		0.188	1/8	1/2	1 1/8	J
		0.250	1/8	1/2	1 3/16	J
 <p><b>Non-Adjustable Compression SS</b></p>	303 SS	0.063	1/8	1/2	1 1/4	L
		0.125	1/8	1/2	1 1/4	L
		0.188	1/8	1/2	1 5/16	L
		0.250	1/8	1/2	1 5/16	L
 <p><b>Adjustable Compression TFE Gland</b></p>	303 SS	0.063	1/8	1/2	1 1/4	G
		0.125	1/8	1/2	1 1/4	G
		0.188	1/8	1/2	1 1/4	G
		0.250	1/4	7/8	2 7/16	X
 <p><b>Adjustable Compression Lava Gland</b></p>	303 SS	0.063	1/8	1/2	1 1/4	Q
		0.125	1/8	1/2	1 1/4	Q
		0.188	1/8	1/2	1 1/4	Q
		0.250	1/4	7/8	2 7/16	V


**Compression Fittings:** Compression fittings are shipped finger-tight on the sheath allowing field installation. Once non-adjustable fittings are deformed, they cannot be relocated. Adjustable fittings come with Tetrafluorethylene (TFE) sealant or lava sealant glands.




## RTDs

### Fitting Options (Continued)

#### Adjustable Spring Loaded

Fitting Type	Material	Sheath Size in.	NPT Thread Size in.	Hex Size in.	Length in.	Code
	316 SS	0.250	1/2	7/8	2	H

#### Bayonet Lockcap and Spring

Fitting Type	Material	Sheath Size in.	Length in.	Code
	Plated Steel	0.125	1 <sup>5</sup> / <sub>8</sub>	W
	Plated Steel	0.188	1 <sup>5</sup> / <sub>8</sub>	W



# Resistance Temperature Sensors

## RTDs

Watlow® manufactures a variety of RTD sensors that are specially designed to ensure precise and repeatable temperature measurement. Watlow sensors are built to meet the most demanding industrial applications while providing a lower total cost of ownership for our customers.

### Performance Capabilities

- Precise and stable within the wide temperature range of -328 to 1200°F (-200 to 650°C)

### Features and Benefits

#### Strain-free construction

- Provides dependable, accurate readings
- Allows elements from different lots to be substituted with no recalibration needed

#### High signal-to-noise output

- Increases accuracy of data transmission
- Permits greater distances between sensor and measuring equipment

#### Temperature coefficient (alpha) carefully controlled while insulation resistance values exceed

#### DIN-IEC-751 standards

- Ensures sensor sensitivity
- Minimizes self heating
- Allows precise measurement
- Repeatable




### Typical Applications

- Stoves, grills, fryers and other food equipment
- Textile production
- Plastics processing
- Petrochemical processing
- Air, gas and liquid temperature measurement
- Exhaust gas temperature measurement
- Semiconductor processing
- Bearing and gear boxes



## RTDs

### Standard Industrial Insulated Leads Style RB

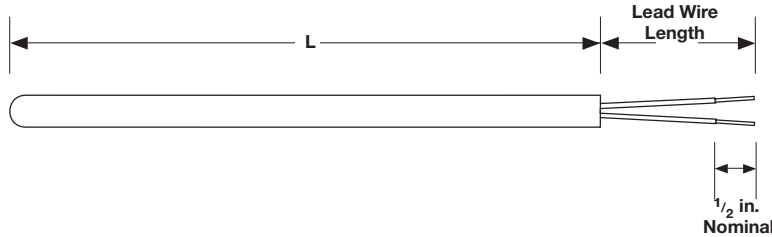

## Ordering Information

### Part Number

①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬	⑭	⑮
RB		Sheath O.D. (in.)	Lead Wire Const.	Fittings	Lead Wire Term.	Sheath Const.	Sheath Length "L" (in.)	Sheath Length "L" (fract. in.)	Element	Initial Element Accuracy	Lead Wire Length (ft)	0		

③ Sheath O.D. (in.)	
G =	0.125
H =	0.188
J =	0.250
<b>Note:</b> 0.125 dia. supplied with 28 gauge wire. 0.188 and 0.250 dia. supplied with 24 gauge wire.	

④ Lead Wire Construction*			
	Standard	Overbraided	Flex Armor
Fiberglass stranded	A	J*	R*
PFA stranded	B	L*	T*
Certain option combinations must be furnished with a transition between the sheath and lead wire. Contact the factory if a transition is unacceptable.			
*May require a transition.			

⑤ Fittings	
If required, enter the order code from pages ???. If none enter "0."	

⑥ Lead Wire Termination	
A* =	Standard male plug 400°F (200°C)
B* =	Standard female jack
C* =	Standard plug with mating connector
J* =	Male miniature plug
K* =	Female miniature jack
L* =	Male/female mini set
T =	Standard leads
U =	Leads with spade lugs
* Requires two-or three-wire, single element only.	

⑦ Sheath Construction	
A =	316/316L SS

⑧ ⑨ Sheath Length "L" (in.)	
Available lengths: 02 to 36	

⑩ Sheath Length "L" (fractional in.)	
0 =	No fraction, whole inches
4 =	1/2 in.

⑪ Element			
	2-Wire	3-Wire	4-Wire
100Ω single	A	B	C
100Ω dual*	D	E	—
1000Ω single	J	K	L
* Available in 0.250 inch diameter only.			

⑫ Initial Element Accuracy @ 0°C	
A =	DIN Class A (±0.06%)
B =	DIN Class B (±0.12%)

⑬ ⑭ Lead Wire Length (ft)	
Whole feet: 01 to 99	
<b>Note:</b> Single wires for 4 feet and under. Duplex wires for over 4 feet.	

## Features and Benefits

### High accuracy

- Dependable readings

### Customized diameters

- From 0.125 to 0.250 inch

### Epoxy sealed

- Resists moisture and pull out
- Standard 500°F (260°C) potting

### Durable rigid sheath

- 316 stainless steel -58 to 500°F (-50 to 260°C)

### Internal heat transfer paste


- Quick time response



# Resistance Temperature Sensors

## RTDs

Plug or Jack Termination  
Style RC



## Ordering Information

### Part Number

① ②	③	④	⑤	⑥	⑦	⑧ ⑨	⑩	⑪	⑫	⑬ ⑭	⑮
RC	Sheath O.D. (in.)	Cold End Term.	Fittings	0	A	Sheath Length "L" (in.)	Sheath Length "L" (fract. in.)	Element	Initial Element Accuracy	00	0

③ Sheath O.D. (in.)	
G =	0.125
H =	0.188
J =	0.250
<b>Note:</b> 0.125 dia. supplied with 28 gauge wire. 0.188 and 0.250 dia. supplied with 24 gauge wire.	

④ Cold End Termination	
A =	Standard plug
C =	Standard plug with mating connector
<b>Note:</b> Standard plugs and jacks 400°F (200°C).	

⑤ Fittings	
If required, enter the order code from pages ????. If none enter "0."	

⑦ Sheath Construction	
A =	316/316L SS

⑧ ⑨ Sheath Length "L" (in.)	
Whole inches: 02 to 36	

⑩ Sheath Length "L" (fractional in.)	
0 =	No fraction, whole inches
4 =	1/2 in.

⑪ Element		
	2-Wire	3-Wire
100Ω single	A	B
1000Ω single	J	K

⑫ Initial Element Accuracy @ 0°C	
A =	DIN Class A (±0.06%)
B =	DIN Class B (±0.12%)

## Features and Benefits

### Durable rigid sheath

- 316 SS -58 to 500°F (-50 to 260°C)

### Durable connectors with copper pins

- 400°F (200°C) temperature rating
- Provides simple connection to extension leads

### Brazed adapter

- Provides superior connector attachment


### High accuracy

- Ensures dependable readings



## RTDs

### Metal Transitions Style RF



## Ordering Information

### Part Number

① ②	③	④	⑤	⑥	⑦	⑧ ⑨	⑩	⑪	⑫	⑬ ⑭	⑮
RF	Sheath O.D. (in.)	Lead Wire Const.	Fittings	Lead Wire Term.	Sheath Const.	Sheath Length "L" (in.)	Sheath Length "L" (fract. in.)	Element	Initial Element Accuracy	Lead Wire Length (ft)	0

③ Sheath O.D. (in.)	
G =	0.125
H =	0.188
J =	0.250
<b>Note:</b> All sheath diameters, MI cable only (high temp) are 24 gauge duplex lead wire.	

④ Lead Wire Construction			
	Standard	Overbraided	Flex Armor
Fiberglass stranded	A	J	R
PFA stranded	B	L	T

⑤ Fittings
If required, enter the order code from pages ????. If none enter "0."

⑥ Lead Wire Termination	
A* =	Standard male plug
B* =	Standard female jack
C* =	Standard plug with mating connector
J* =	Male miniature plug
K* =	Female miniature jack
L* =	Male/female mini set
T =	Standard leads
U =	Leads with spade lugs
* Requires two-or three-wire, single element only.	

⑦ Sheath Construction	
K =	316/316L SS mineral insulated

⑧ ⑨ Sheath Length "L" (in.)	
Whole inches: 03 to 99, metric lengths and lengths over 99 inches contact factory. Maximum length 165 inches.	

⑩ Sheath Length "L" (fractional in.)	
0 =	No fraction, whole inches
4 =	1/2 in.

⑪ Element		
	2-Wire	3-Wire
100Ω single	A	B

⑫ Initial Element Accuracy @ 0°C	
A =	DIN Class A (±0.06%)
B =	DIN Class B (±0.12%)

⑬ ⑭ Lead Wire Length (ft)	
Whole feet: 01 to 99	

## Features and Benefits

### Stainless steel transitions filled with 500°F (260°C) epoxy

- Protects sensor from moisture
- Encapsulates connection between wire and cable

### Coiled spring strain relief

- Protects lead wire against sharp bends in the transition area

### Flexible mineral insulated construction

- Provides a bendable and highly durable sensor

### Temperature rating

- -328 to 1200°F (-200 to 650°C)

### High accuracy

- Ensures dependable readings

### Diameters available

- 0.125 to 0.250 inch O.D.







# Resistance Temperature Sensors

## RTDs

### Connection Head/Optional Transmitter Style RR

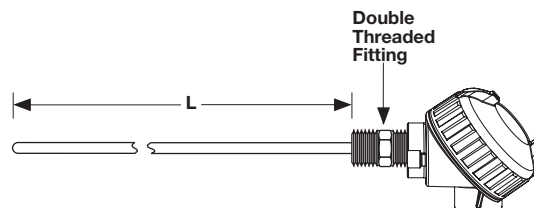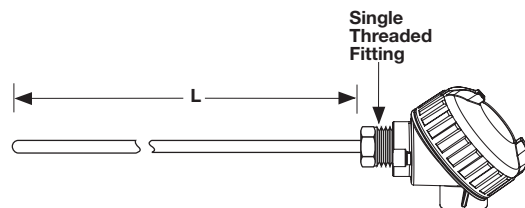

## Ordering Information

### Part Number

① ②	③	④	⑤	⑥	⑦	⑧ ⑨	⑩	⑪	⑫	⑬ ⑭	⑮
RR	Sheath O.D. (in.)	Con. Head	Head Mtg. Fittings	0	Sheath Const.	Sheath Length "L" (in.)	Sheath Length "L" (fract. in.)	Element	Initial Element Accuracy	00	Tag Style

③ Sheath O.D. (in.)	
G =	0.125
H =	0.188
J =	0.250
<b>Note:</b> 0.125 dia. supplied with 28 gauge wire. 0.188 and 0.250 dia. supplied with 24 gauge wire.	

④ Connection Head	
C =	Polypropylene
D =	Cast iron
E =	Cast aluminum
H =	Explosion proof
U* =	E head with 5750 transmitter
V* =	C head with 5750 transmitter
W* =	H head with 5750 transmitter
* For units with transmitter, the order must specify a range and degree F or C, as well as a temperature span.	

⑤ Head Mounting Fittings	
O =	Single threaded, 303 SS
F =	Double threaded, 303 SS 1/2 in. NPT
H* =	Spring loaded, double threaded, 316 SS 1/2 in. NPT
* Available in 0.250 inch diameter only.	

⑦ Sheath Construction		
	-58 to 500°F (-50 to 260°C) 316 SS	-328 to 1200°F (-200 to 650°C) 316 SS
Standard industrial (0.125 - 0.250 in. O.D.)	A	—
Mineral insulated (0.125 - 0.250 in. O.D.)	—	K

⑧ ⑨ Sheath Length "L" (in.)	
A =	Sheath construction requires 2 in. min to 36 in. max. length
K =	Sheath construction requires 3 in. min to 99 in. max. length

⑩ Sheath Length "L" (fractional in.)	
0 =	No fraction, whole inches
1 =	1/8
2 =	1/4
3 =	3/8
4 =	1/2
5 =	5/8
6 =	3/4
7 =	7/8

	⑪ Element		
	2-Wire	3-Wire	4-Wire
100Ω single	A	B	C
100Ω dual *, **	D	E	—
1000Ω single **	J	K	L
* Available in 0.250 inch diameter only.			
** Available with standard industrial construction only.			

⑫ Initial Element Accuracy @ 0°C	
A =	DIN Class A (±0.06%)
B =	DIN Class B (±0.12%)

⑮ Tag Style	
0 =	Polymeric
1 =	300 SERIES SST

## Features and Benefits

### Connection heads

- Provides superior dust and moisture resistance

### Weatherproof plastic heads

- Resists weak acids, organic solvents, alkalies, sunlight and dust

## Complete assembly available

- Head-mounted 4-20mA transmitter, three- or four-wire input and non-isolated




## RTDs

### For Use With Thermowells Style RT




Type 1

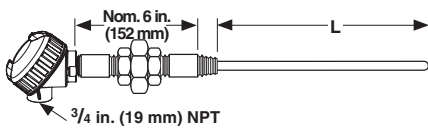


6 inch N-U-N Typical (2 each 1/2 X 3 inch steel pipe nipples and 1 each malleable union)

Type 3

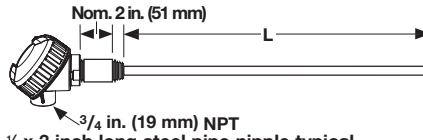

1/2 x 3 inch long steel pipe nipple typical

Type 4



## Ordering Information

### Part Number

1	2	3	4	5	6	7	8 9	10	11	12	13	14	15
RT		Sheath O.D. (in.)	Conn. Head	Cold End Config.		Sheath Const.	Sheath Length "L" (in.)	Sheath Length "L" (fract. in.)	Element	Initial Element Accuracy		Spring-Loading	Tag Style
RT					0						0		

3 Sheath O.D. (in.)	
J =	0.250
<b>Note:</b> Supplied with 24 gauge wire.	

4 Connection Head	
C =	Polypropylene
D =	Cast iron
E =	Cast aluminum
H =	Explosion proof
U* =	E head with 5750 transmitter
V* =	C head with 5750 transmitter
W* =	H head with 5750 transmitter
* For units with transmitter, the order must specify a range and degree F or C, as well as a temperature span.	

5 Cold End Configuration	
1 =	Type 1
3 =	Type 3
4 =	Type 4

7 Sheath Construction		
	-58 to 500°F (-50 to 260°C) 316 SS	-328 to 1200°F (-200 to 650°C) 316 SS
Standard industrial (0.125 - 0.250 in. O.D.) (Max. length 36 in.)	A	—
Mineral insulated (0.125 - 0.250 in. O.D.) (Max. length 165 in.)	—	K

8 9 Sheath Length "L" (in.) - See Drawings Above	
*When ordering a complete assembly with thermowell, specify "AR" as required and reference pages 103 to 107 for "U" dimension; otherwise, specify the "L" dimension in whole inches.	
<b>*Note,</b> maximum sheath length is 36 inches for sheath construction A.	

10 Sheath Length "L" (fractional in.)	
0 =	No fraction, whole inches
1 =	1/8
2 =	1/4
3 =	3/8
4 =	1/2
5 =	5/8
6 =	3/4
7 =	7/8

11 Element			
	2-Wire	3-Wire	4-Wire
100Ω single	A	B	C
100Ω dual*	D	E	—
1000Ω single*	J	K	L
* Available with standard industrial construction only.			

12 Initial Element Accuracy @ 0°C	
A =	DIN Class A (±0.06%)
B =	DIN Class B (±0.12%)

14 Spring -Loading	
Y =	Yes
N =	No

15 Tag Style	
0 =	Polymeric
1 =	300 SERIES SST

## Features and Benefits

### High quality thermowells and pipe wells

- Protects sensor

### Mineral insulated construction

- Available in 0.125 to 0.250 inch O.D.

### Available with spring-loading

- Ensures positive contact

### Complete assembly available

- Head-mounted 4-20mA transmitter, three- or four-wire input and non-isolated

### Variety of connection head options


- Meets your application requirements



# Resistance Temperature Sensors

## RTDs

For Use With Thermowells  
Style RW

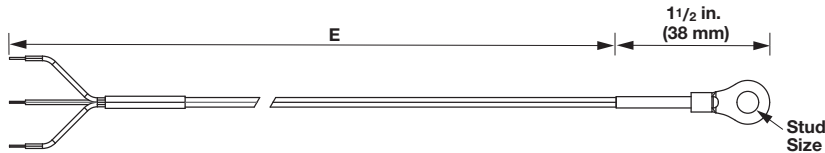

## Ordering Information

### Part Number

①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬	⑭	⑮
		Sheath O.D. (in.)	Lead Wire Const.		Lead Wire Term.	Stud Size - Hole Dia. (inch)				Element	Temp. Coefficient	Lead Wire Length "E" (foot)		Special Reqmts.
RW		G		0			0	0	0					0

③ Sheath O.D. (in.)	
G =	0.125

④ Lead Wire Construction	
A =	900°F (500°C) Fiberglass stranded
B =	400°F (200°C) Teflon® stranded

⑥ Lead Wire Termination	
A =	Standard male plug
B =	Standard female plug
C =	Standard plug with mating connector
T =	Standard leads
U =	Leads with spade lugs

⑦ Stud Size - Hole Diameter (inch)	
A =	No. 6 - 0.144
B =	No. 8 - 0.169
C =	No. 10 - 0.196
D =	1/4 - 0.266
E =	3/8 - 0.390

⑪ Element		
	2-Wire	3-Wire
100Ω single	A	B

⑫ Temperature Coefficient	
	DIN 0.00385
Class A	A
Class B	B

⑬ ⑭ Lead Wire Length "E" (foot)	
Whole feet:	01-99

⑮ Special Requirements	
If none, enter "0." If required, contact factory.	

## Features and Benefits

### Sensor temperature rating

- -50° to 200°C

### High accuracy

- Ensures dependable readings

### Washer terminals

- Brazed to a 316 SS tube, 0.125 in. diameter, 1 1/2 in. long.

### Sensors placed beneath existing screws or bolts

- Permits surface temperature measurement




## RTDs

### Specialty Construction Styles


#### Adjustable Spring Style

Part Number 10 = 6 in.  
Part Number 11 = 12 in.

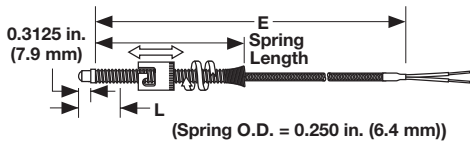


#### Open Air

Part Number 50

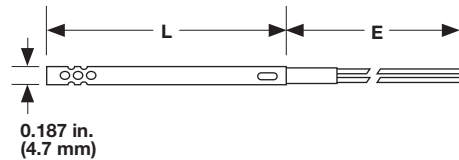


#### Adjustable Armor Style

Part Number 12

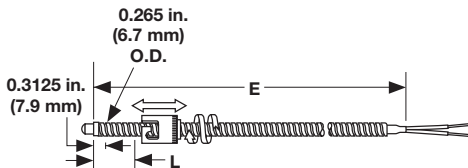


#### Open Air with Flange

Part Number 55

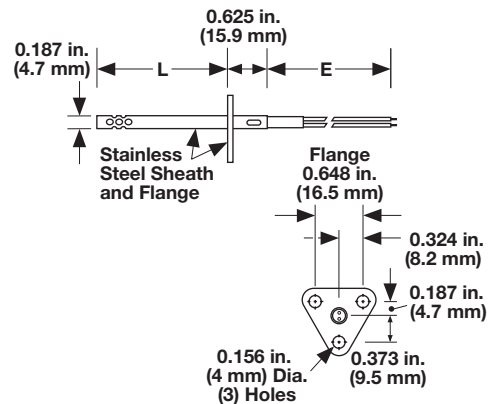


#### Cartridge with Flange

Part Number 25

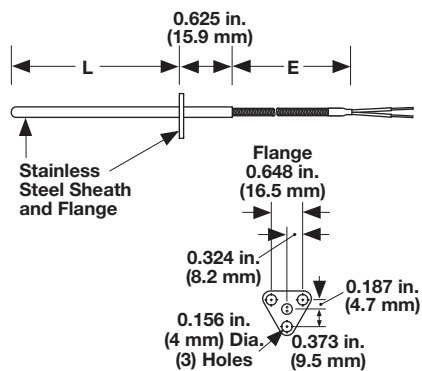

#### Surface Mount

Part Number 80

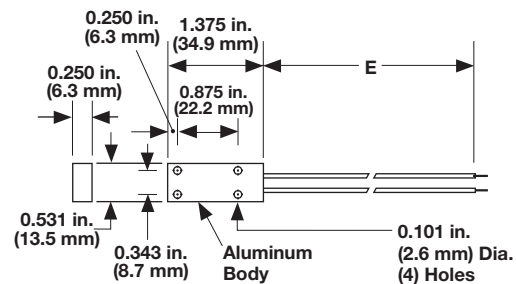



# Resistance Temperature Sensors

## RTDs

### Specialty RTDs



### Ordering Information

#### Part Number

1	2 3	4	5	6 7	8	9 10 11	12
	Const. Styles	Diameter (in.)	Element Type	Lead Type	Sheath Length "L" (in.)	Lead Wire Length "E" (ft)	Term.
S							

2 3	Construction Styles
10 =	6 inch adjustable spring style
11 =	12 inch adjustable spring style
12 =	Adjustable armor style
25 =	Cartridge with flange
50 =	Open air
55 =	Open air with flange
80 =	Surface mount

**Note:** See previous page for construction style drawings.

4	Diameter (in.)
D =	0.188
A =	Not applicable: surface mount

5	Element Type
C =	RTD 2-wire, 100Ω DIN 0.00385
D =	RTD 3-wire, 100Ω DIN 0.00385

6 7	Lead Type
L4 =	Fiberglass and SS armor
M4 =	Fiberglass
N4 =	Fiberglass and SS overbraid
T2 =	PFA

8	Sheath Length "L" (in.)				
A =	Not applicable	K =	5.0 in.	T =	9.0 in.
C* =	1.5 in.	L =	5.5 in.	U =	9.5 in.
D =	2.0 in.	M =	6.0 in.	W =	10 in.
E =	2.5 in.	N =	6.5 in.	Y =	11 in.
F =	3.0 in.	P =	7.0 in.	Z =	12 in.
G =	3.5 in.	Q =	7.5 in.		
H =	4.0 in.	R =	8.0 in.		
J =	4.5 in.	S =	8.5 in.		

\* 1.5 required for VAT construction: No. 10, 11, 12)

9 10 11	Lead Wire Length "E" (ft)		
012 =	1 ft	084 =	7 ft
024 =	2 ft	096 =	8 ft
036 =	3 ft	108 =	9 ft
048 =	4 ft	120 =	10 ft
060 =	5 ft	180 =	15 ft
072 =	6 ft		

12	Terminations
A =	1.5 inch stripped split leads, no terminals
B =	No. 8 spade terminals
H =	0.25 in. female quick connect terminals

### Specifications

- Two- or three-wire
- Resistance: 100Ω at 0°C
- Alpha curve: 0.00385Ω/Ω/°C
- Tolerance at 0°C: ±0.12%
- Range: -58 to 500°F (-50 to 260°C)



## ENVIROSEAL™ HD Sensors

Watlow's ENVIROSEAL™-HD temperature sensor keeps out moisture, oil and contaminants in all heavy-duty applications including those outside applications exposed to harsh weather, oils and other extreme moisture environments. The ENVIROSEAL-HD sensor is designed to provide accurate, dependable measurements in high-vibration environments.

### Features and Benefits

#### Submersible and 1200psi pressure wash rated seal (not including connector area)

- Protects the sensor from washdown or other extreme moisture environments

#### Oil resistant materials

- Sensors maintain a long life even when exposed to oil, gasoline or diesel fuel

#### Vibration resistant design, 25 lb pull out force rating

- Tough, rugged design to hold up to the roughest applications

#### -40 to 392°F (-40 to 200°C) sensor temperature rating


- Offers superior application flexibility

#### Time response of two seconds

- Fast response measures 63.2% (first order) of the temperature change in two seconds or less

#### 250psi threaded fitting pressure rating

- Suitable for most rugged applications

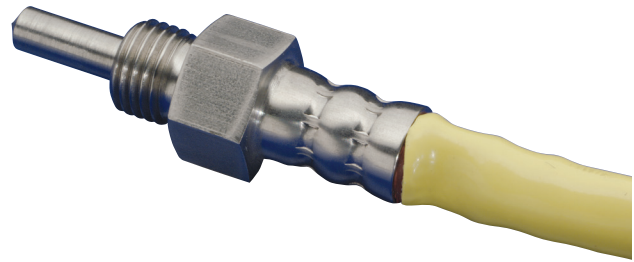

### Typical Applications

- Engine coolant or oil
- Refrigeration or condensation units
- Industrial equipment
- Heat exchangers
- Gear boxes
- Hydraulic fluid
- Marine

