

# ADDENDUM TO 2604 CONTROLLER

This addendum concerns controllers fitted with the Low Voltage Supply option, VL in the ordering code.

## 1. Power Supply Wiring (Low voltage)

The 2604 controller is suitable for connection to a power supply of between 20 and 29Vac 50 or 60 Hz or 20 to 29Vdc. It is the users responsibility to provide an external fuse or circuit breaker. Suitable fuses are T type (EN60127 time-lag type) rated at 4A

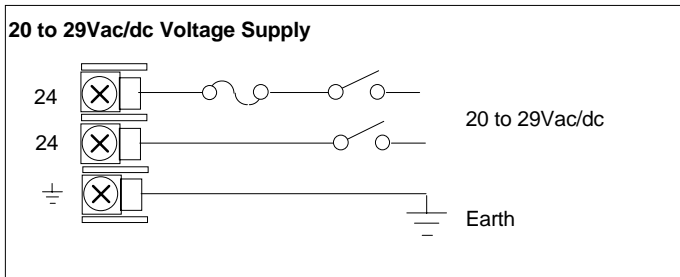


Figure 0-1: Wiring Connections for Low Voltage Supply

