

- Bright Easy to Read Display
- Horizontal or High 800 x 600 Resolution
- Easy Mounting
- Advanced Functionality at a Dedicated Display Price
- Optional - Custom Software Installation



## OPTIMA Touch 10.4" With 10.4" Touch Screen Specification Sheet

### Product Overview

The 10.4" OPTIMA Touch Panel is a rugged, compact industrial computer combined with a 10.4" TFT touch screen monitor in one housing. It is designed to serve as a general purpose human machine interface (HMI). It can be ordered pre-configured with several HMI software packages.

### Features and Benefits

**Increased Productivity** - Utilizing an industrial computer versus a proprietary operator station can significantly improve productivity. This is due to the computer's ability to integrate all the discrete hardware and software components into one seamless interface for the operator. In addition, all the local operator interfaces can then be networked into a common supervisory system. One common interface to support, maintain and administer.

**Reduced Downtimes** - Maintenance personnel can locally run programming tools with on-line diagnostics to quickly resolve problems.

**Rugged Design** - The 10.4" OPTIMA Touch is designed for the rugged industrial environment. A heavy-duty steel chassis and low component count circuit designs provide for enhanced reliability, and increased shock, vibration and EMI immunity.

**Compact Size** - Unit depth is limited to 108mm, ideal for fitting into confined spaces. Unique bracket mounting system for fitting into the panel cutout. No need for drilling holes or fixing studs.

**"Plug & Play" Operation** - Custom installation of different software packages is available to reduce start-up costs.

### Applications


The 10.4" OPTIMA Touch Industrial Computer has been designed for operation under harsh environmental conditions in a multitude of vertical markets including automotive, semi-conductor, transportation, plastics, heat treating, utilities and more. Thanks to a built-in fast Ethernet port, the 10.4" OPTIMA Touch provides instant connectivity to a plant's intranet and networked servers.

## SPECIFICATIONS


Construction:	Heavy-duty steel chassis & aluminum front panel with NEMA 12/IP54
LCD:	10.4" TFT 800 x 600 (Horizontal Mounting Only)
Touch Screen:	Analog Resistive Continuous Resolution
Processor Speed:	1.3 GHz Celeron, FSB 133MHz
DRAM:	512MB DIMM
BIOS:	Phoenix-Award
VGA Controller:	S3 ProSavage4 4xAGP 3D/2D SVGA up to 1600x1200 32 bit
VGA Memory:	32MB (shared)
VGA Port:	Supports simultaneous display with additional monitor
Ethernet:	(1) 10/100 Base-T Realtek RTL8139C RJ-45 connector
Serial Ports:	(3) RS-232; (1) RS-232/422/485
Parallel Port:	(1) Parallel
USB Ports:	(2) USB
Storage:	40GB (standard) 512MB Flash Drive (optional)
Keyboard Port:	PS/2

Mouse Port:	PS/2
Expansion Slot:	(1) 32-bit PCI (half length)
Operating Systems:	Windows™ XP Professional (standard); Windows™ XP Embedded (optional, required for flash drive)
Power Supply:	85 to 264 V ac, 90 Watts (standard) 19 to 32Vdc, 90 Watts (optional)
Temperature:	Ambient 0 to +50°C (32 to 122°F) Storage -20 to +60°C (-4 to 140°F)
Operating Humidity:	5-95% @ 50°C (122°F), non-condensing
Operating Shock:	20G minimal acceleration nominal duration 11 msec applied all three mutually exclusive axis
Operating Vibration:	5 to 200Hz @ 1G traversed at rate .5 Oct/min on all three mutually exclusive axis
Protection Class:	NEMA 12/IP54 (Front Side)
Safety:	CE/UL/CUL
EMC:	CE/FCC Class A

## DIMENSIONS

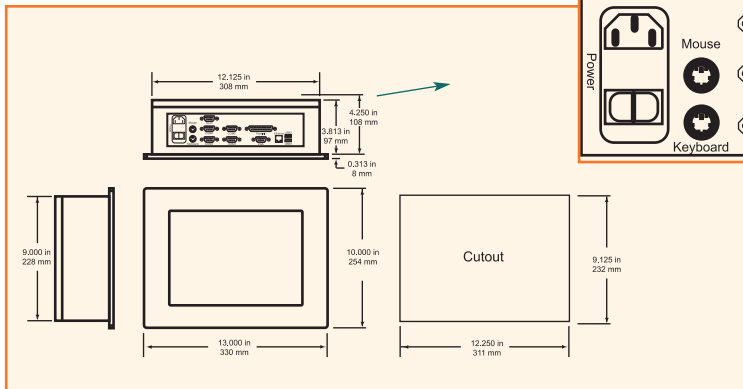

## PORTS (ENLARGED)

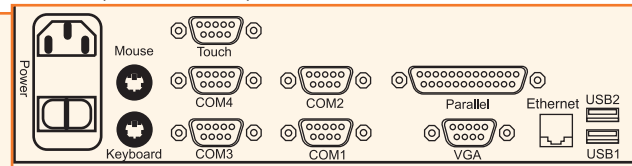

**Eurotherm:** International sales and service

[www.eurotherm.com](http://www.eurotherm.com)

**AUSTRALIA** Melbourne  
**T** (+61 0) 8562 9800  
**E** [info.eurotherm.au@invensys.com](mailto:info.eurotherm.au@invensys.com)  
**AUSTRIA** Vienna  
**T** (+43 1) 7987601  
**E** [info.eurotherm.at@invensys.com](mailto:info.eurotherm.at@invensys.com)  
**BELGIUM & LUXEMBOURG** Moha  
**T** (+32) 85 274080  
**E** [info.eurotherm.be@invensys.com](mailto:info.eurotherm.be@invensys.com)  
**BRAZIL** Campinas-SP  
**T** (+5519) 3707 5333  
**E** [info.eurotherm.br@invensys.com](mailto:info.eurotherm.br@invensys.com)  
**CHINA**  
**T** (+86 21) 61451188  
**E** [info.eurotherm.cn@invensys.com](mailto:info.eurotherm.cn@invensys.com)

**Beijing Office**  
**T** (+86 10) 5909 5700  
**E** [info.eurotherm.cn@invensys.com](mailto:info.eurotherm.cn@invensys.com)  
**FRANCE** Lyon  
**T** (+33 478) 664500  
**E** [info.eurotherm.fr@invensys.com](mailto:info.eurotherm.fr@invensys.com)  
**GERMANY** Limburg  
**T** (+49 6431) 2980  
**E** [info.eurotherm.de@invensys.com](mailto:info.eurotherm.de@invensys.com)  
**INDIA** Mumbai  
**T** (+91 22) 67579800  
**E** [info.eurotherm.in@invensys.com](mailto:info.eurotherm.in@invensys.com)  
**IRELAND** Dublin  
**T** (+353 1) 4691800  
**E** [info.eurotherm.ie@invensys.com](mailto:info.eurotherm.ie@invensys.com)

**ITALY** Como  
**T** (+39 031) 975111  
**E** [info.eurotherm.it@invensys.com](mailto:info.eurotherm.it@invensys.com)  
**KOREA** Seoul  
**T** (+82 2) 2090 0900  
**E** [info.eurotherm.kr@invensys.com](mailto:info.eurotherm.kr@invensys.com)  
**NETHERLANDS** Alphen a/d Rijn  
**T** (+31 172) 411752  
**E** [info.eurotherm.nl@invensys.com](mailto:info.eurotherm.nl@invensys.com)  
**POLAND** Katowice  
**T** (+48 32) 78395000  
**E** [info.eurotherm.pl@invensys.com](mailto:info.eurotherm.pl@invensys.com)  
**SPAIN** Madrid  
**T** (+34 91) 6616001  
**E** [info.eurotherm.es@invensys.com](mailto:info.eurotherm.es@invensys.com)

**SWEDEN** Malmo  
**T** (+46 40) 384500  
**E** [info.eurotherm.se@invensys.com](mailto:info.eurotherm.se@invensys.com)  
**SWITZERLAND** Wollerau  
**T** (+41 44) 7871040  
**E** [info.eurotherm.ch@invensys.com](mailto:info.eurotherm.ch@invensys.com)  
**UNITED KINGDOM** Worthing  
**T** (+44 1903) 268500  
**E** [info.eurotherm.uk@invensys.com](mailto:info.eurotherm.uk@invensys.com)  
**U.S.A.** Ashburn VA  
**T** (+1 703) 724 7300  
**E** [info.eurotherm.us@invensys.com](mailto:info.eurotherm.us@invensys.com)

ED64

© Copyright Eurotherm Limited 2011

Invensys, Eurotherm, the Eurotherm logo, Chessell, EurothermSuite, Mini8, Eycon, Eyris, EPower nanodac, Foxboro and Wonderware are trademarks of Invensys plc, its subsidiaries and affiliates. All other brands may be trademarks of their respective owners.

All rights are strictly reserved. No part of this document may be reproduced, modified, or transmitted in any form by any means or may be stored in a retrieval system other than for the purpose to act as an aid in operating the equipment to which the document relates, without the prior written permission of Eurotherm Limited.

Eurotherm Limited pursues a policy of continuous development and product improvement. The specifications in this document may therefore be changed without notice. The information in this document is given in good faith, but is intended for guidance only.

Eurotherm Limited will accept no responsibility for any losses arising from errors in this document.

**invensys**  
 Operations Management